

IC0651D

6.5" Chassis, Water Resistant IP65 Front



Features



6.5" IP65 front chassis LCD monitor provides full protection against ingress of dusts and water projected from front side. All of Digimore IP65 front product series goes through the standard testing procedures to test the design reliability. The design meets IP65 rating while maintaining a sleek appearance.

Specifications

Panel	
Cell Type	Color active matrix TFT LCD panel
Aspect Ratio/ Size	4 : 3/ 6.5" viewable diagonal area
Pixel numbers/ Colors	640 (H) x 480 (V) / 262 K
Pixel Pitch / Active Area	0.207 (H) x 0.207 (V) mm/ 132.48 (H) x 99.36 (V) mm
Light Source	Long life, 50,000 hours (typ)
Brightness/ Contrast Ratio	400 cd/m ² ; 500 : 1
Viewing Angle	140° (typ) in horizontal/ 120° (typ) in vertical
Response	< 25 ms
Others	
Input Terminal	15 Pin D-Sub x 1, Stereo Headphone Jack x 1, DC Power Plug x 1
Audio System	Stereo amplifier 2W x 2
Convenient Features	IP65 front side sealed for water-dust proof
	Auto Calibration, Backlight adjustment, Plug& Play (VESA DDC/CI, DDC 2B), Wall-Mount Ready (VESA 75 x 75 mm), Multi-language OSD
Power – Input Voltage	Universal/ Auto-sensing, 90 ~ 260 VAC, 50/60 Hz
Power Rating (DPMS support)	12W in operating/ 2W in Standby
Dimensions With Flange	TBD (Mechanical drawing with dimension for reference)
Carton (mm)/ Weight (Kgs)	TBD/ 2.5 kgs (N.W.), 3.0 Kgs (G.W.)
Optional	SV+AV, Stainless Housing, Touch Screen, Mini-ITX PC system built-in



Dimension

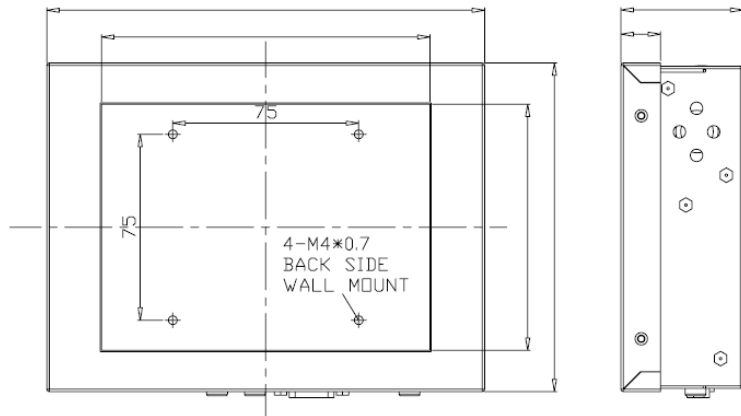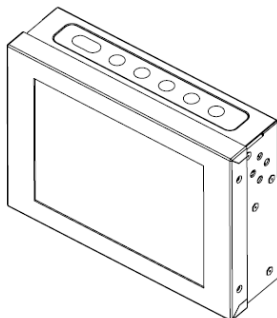

* All specifications and photos are subject to change without notice.