

ISC19W2D

19" **Stainless** Widescreen, Water Resistant IP66 Full Protection



Features


IP66 Stainless Chassis 19" Widescreen LCD monitor provides full protection against ingress of dusts and water projected from front side. The IP66 product series goes through the standard testing procedures to test the design reliability. The design meets IP66 rating while maintaining a sleek appearance.

Specifications

Panel		
Cell Type	Color active matrix TFT LCD panel	
Aspect Ratio/ Size	Wide/ 19" viewable diagonal area	
Pixel numbers/ Colors	1440 (H) x 900 (V) / 16.7 million	
Pixel Pitch/ Active Area (mm)	0.284 (H) x 0.284 (V) / 408.24 (H) x 255.15 (V)	
Light Source	CCFL, Long life, 50,000 hours (typ)	
Brightness/ Contrast	300 cd/ m ² / 1000 : 1	
Viewing Angle	170° (typ) in horizontal/ 130° (typ) in vertical	
Response	< 5 ms	
Others		
Input Terminal	1 X VGA (15 Pin D-Sub), 1 x Stereo Headphone Jack, 1 x Power Jack	
Audio System	2W Speaker x 2	
Convenient Features	Auto Calibration, Plug& Play (VESA DDC/CI, DDC 2B), Wall-Mounted Ready (VESA 100 x 100), Multi-language OSD, Back light adjusted	
Power - Input Voltage	Universal/ Auto-sensing, 90 ~ 260 VAC, 50/60 Hz	
Power Rating (DPMS support)	30W in operating/ 2W in Standby	
Dimensions	Physical	508 (L) x 355 (W) x 74 (D) mm
	Carton	490 (L) x 426 (W) x 160.0 (D) mm
Weight (Kgs)	11.0 kgs (N.W.), 13.0 Kgs (G.W.)	



Dimension

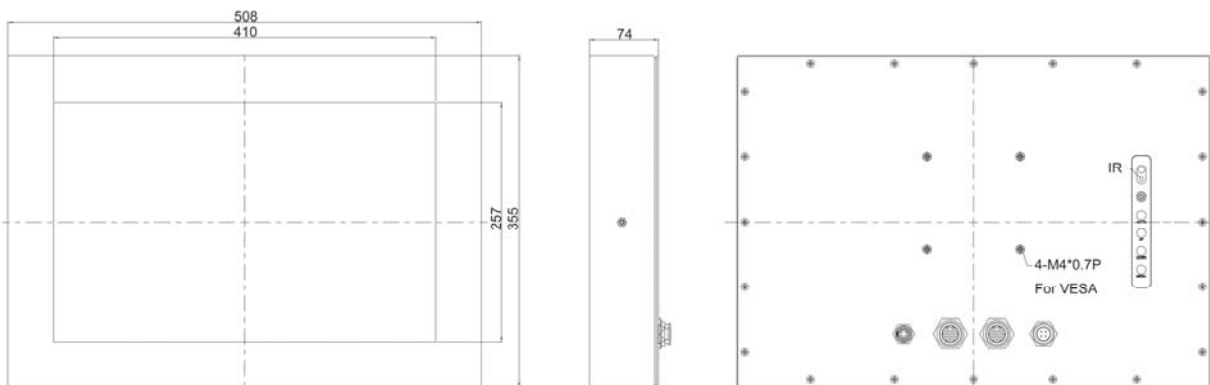

* All specifications and photos are subject to change without notice.